

**BUREAU VERITAS**  
Certification



## ATLAS COMMERCIAL COMPANY (KUWAIT) W.L.L.

Block C1, Plot No.147/148/163/164, Shuaiba Industrial Area  
P.O. Box: 5609, 13057 Safat

### STATE OF KUWAIT

Bureau Veritas Certification Holding SAS – UK Branch certifies that the Management System of the above organisation has been audited and found to be in accordance with the requirements of the management system standards detailed below

## ISO 9001:2015

*Scope of certification*

**MANUFACTURING AND SUPPLY OF STEEL PROFILES FOR GYPSUM PARTITIONING AND CEILING, EXPANDED METAL FOR CEMENT PLASTERING AND GALVANIZED STEEL SHEETS & SLIT COILS FOR THE HVAC INDUSTRY**

Original cycle start date: 13-Feb-2014

Expiry date of previous cycle: 12-Feb-2017

Re-Certification Audit date: 31-Dec-2016

Re-Certification cycle start date: 7-Feb-2017

Subject to the continued satisfactory operation of the organization's Management System, this certificate expires on: 12-Feb-2020

**Certificate No. IND17.6047 U/Q**

Version: No.2

Revision date: 2-Feb-2018

Certification body address: 5<sup>th</sup> Floor, 66 Prescott Street, London E1 8HG, United Kingdom  
Local office: Block D, Street 60, Plot 30, Shuwaikh Industrial Area  
P. O. Box 1476, Dajeej, Farwaniya, 81025, Kuwait



0008


Further clarifications regarding the scope of this certificate and the applicability of the management System requirements may be obtained by consulting the organisation.  
To check this certificate validity please call: (+965 24825977)



**A**tlas Steel Factory is located at Mina Abdulla (Shoaiba) industrial area. The facility is capable of handling coils of up to 24MT unit weight. Apart from cut to length of flat steel, we also produce slit coils up to 3mm thickness. These slit coils are sold to customers for their own use and/ or used in-house to manufacture our own products, viz., expanded metal products for plaster work, profiles for drywall partition and gypsum ceiling, steel ties etc..


We are committed to broadening our competitiveness by continuous improvement of quality, customer service and product range.

We thank you for your interest in our products. We look forward to the opportunity to serve you.

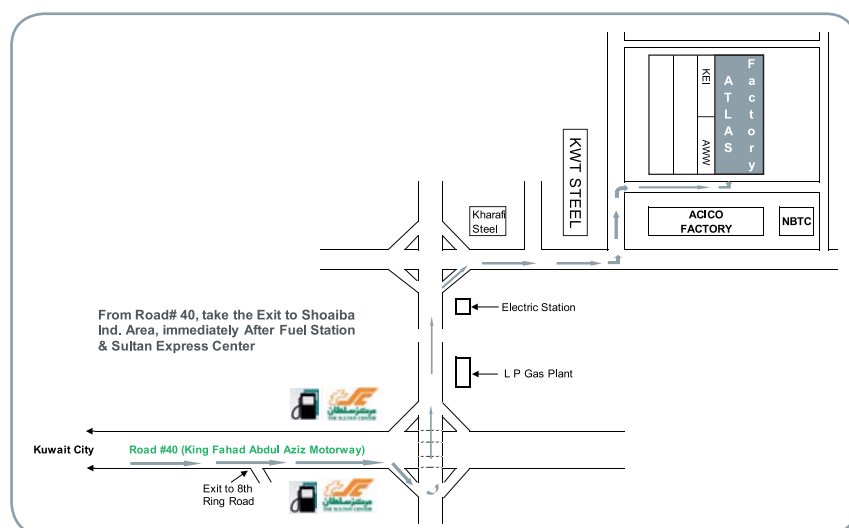

Tel : +965 22086600  
 Fax : +965 22086601  
 E-mail : atlas@atlaskuwait.com  
 Web : www.atlaskuwait.com


# GALVANIZED EXPANDED METAL LATH ACC.TO BS 1369

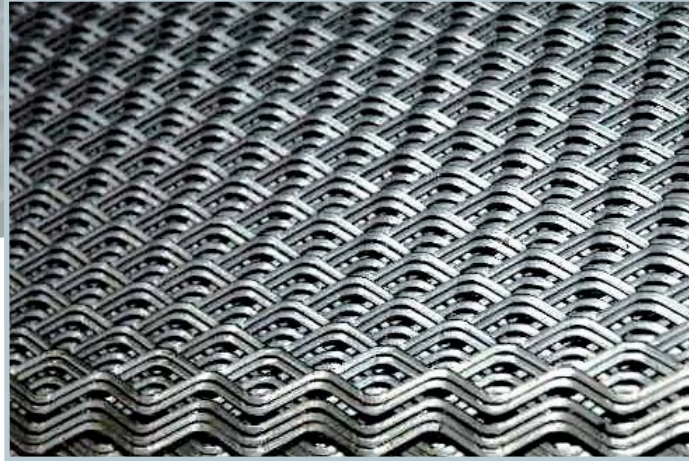

## MATERIAL SPECIFICATION:

Hot Dipped Galvanized steel conforming to JIS G3302/98 CGCC,  
Zinc Coating Z-275 (or) ASTM A653, Zinc Coating G90


Expanded Metal Lath is used to reinforce plaster in order to avoid cracks.

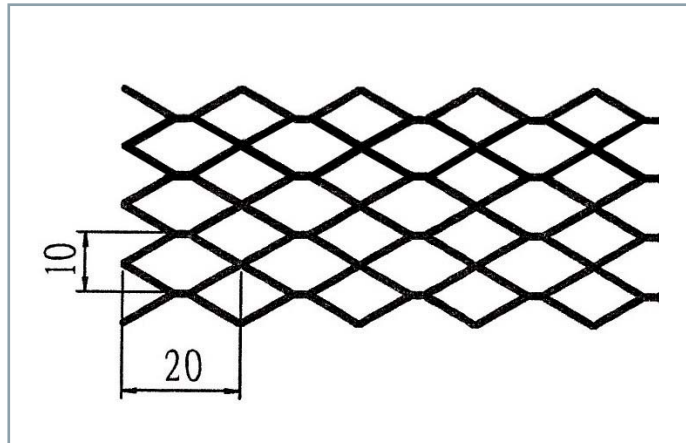

Item	Sheet size		Weight Kg/M <sup>2</sup>
	Width	Length	
ML 060	60cm / 70 cm	244 cm	0.600
ML 075	60cm / 70 cm	244 cm	0.750
ML 090	60cm / 70 cm	244 cm	0.900
ML 110	60cm / 70 cm	244 cm	1.100
ML 136	60cm / 70 cm	244 cm	1.360
ML 140	60cm / 70 cm	244 cm	1.400
ML 161	60cm / 70 cm	244 cm	1.610

\*Other lengths and weights can be produced upon request


# GALVANIZED BRICK MESH IN ROLLS & STRIP LATH

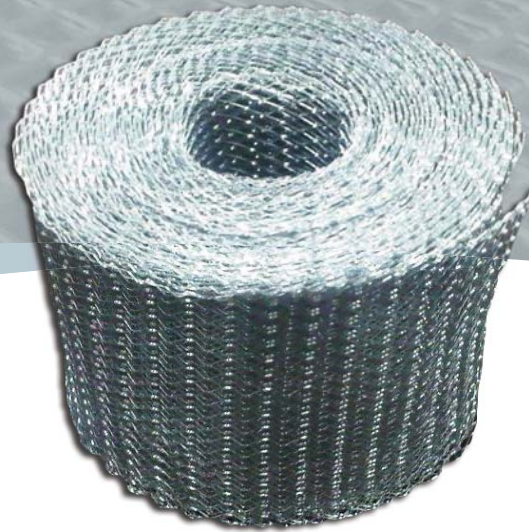

## MATERIAL SPECIFICATION:

Hot Dipped Galvanized steel conforming to JIS G3302/98 SGCC, Zinc Coating Z-275 (or) ASTM A653, Zinc Coating G90.


Brick mesh is used as a reinforcement of block / brick work.  
It protects the walls from cracking

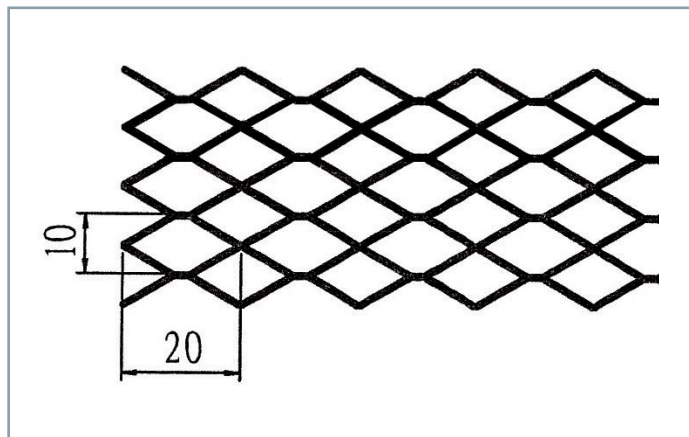

Item	Width	Length	Weight
BM 060	10 / 15 / 20 / 30 cm	50 M or 100M	0.600 Kg/M2
BM 110	10 / 15 / 20 / 30 cm	50 M or 100M	1.100 Kg/M2
BM 161	10 / 15 / 20 / 30 cm	50 M or 100M	1.610 Kg/M2
<b>BM 180</b>	<b>10 / 15 / 20 / 30 cm</b>		<b>1.800 Kg/M2</b>
SL 060	10 / 15 / 20 / 30 cm	2.44 M	0.600 Kg/M2
SL 110	10 / 15 / 20 / 30 cm	2.44 M	1.100 Kg/M2
SL 161	10 / 15 / 20 / 30 cm	2.44 M	1.610 Kg/M2
SL 180	10 / 15 / 20 / 30 cm		1.800 Kg/M2

\*Other lengths and weights can be produced upon request


# GALVANIZED ANGLE BEAD

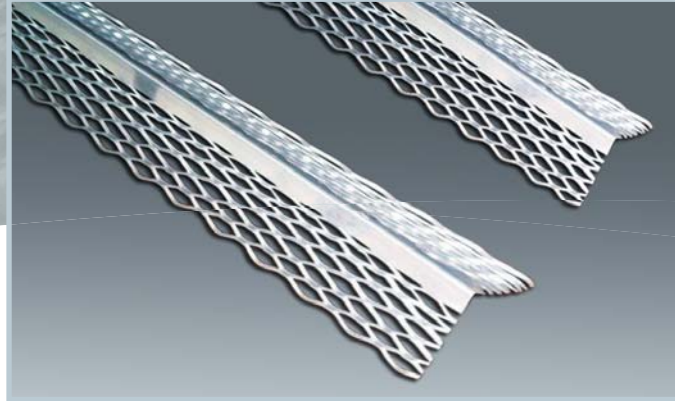

## MATERIAL SPECIFICATION:


Hot Dipped Galvanized steel conforming to JIS G3302 /98 SGCC, Zinc Coating Z-275 (or) ASTM A653, Zing Coating G90

Angle bead is used to provide straight corners which will not chip or crack easily. It provides reinforcement to plaster and protects it from damages

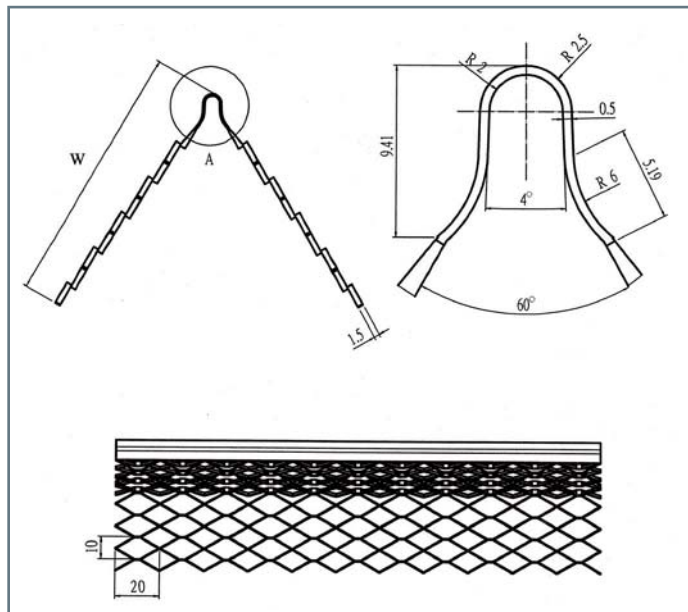

Item	W	Length	Pcs/pack	Gauge
AB 50	50.77 mm	2.70 / 3.00 M	50	24/26
AB 70	70.77 mm	2.70 / 3.00 M	30	24/26


# GALVANIZED PLASTER STOP BEAD

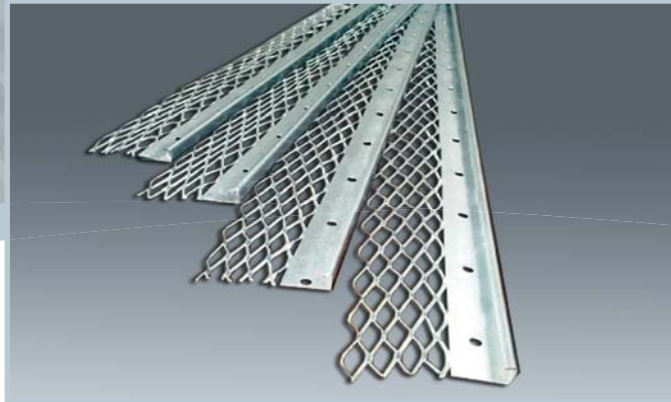

## MATERIAL SPECIFICATION:

Hot Dipped Galvanized steel conforming to JIS G3302 /98 SGCC,  
Zinc Coating Z-275 (or) ASTM A653, Zinc Coating G90

Plaster Stop Bead is used to provide better finishing to the edges of plaster work.  
It ensures protection against chipping and cracking

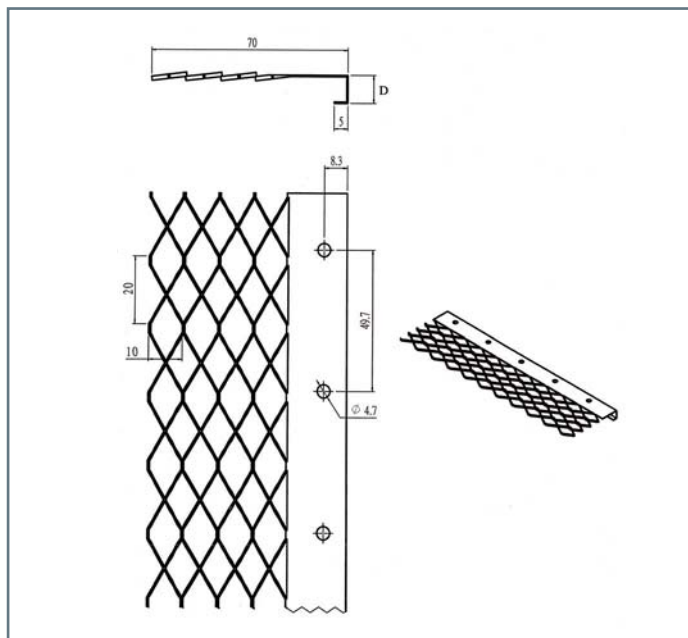

Item	Material	D	Length	Pcs / pack
PS 10	Galv. Steel	10 mm	2.70 / 3.00 M	25 or 50
PS 13	Galv. Steel	13 mm	2.70 / 3.00 M	25 or 50


# GALVANIZED DRYWALL PROFILES



## MATERIAL SPECIFICATION:

Hot Dipped Galvanized steel conforming to JIS G3302 /98 SGCC, Zinc Coating Z-275 (or) ASTM A653, Zing Coating G90


Galvanized steel architrave beads with an expanded meshing specially designed to form plaster stop and a shadow line around door frames or other areas of plasterwork.

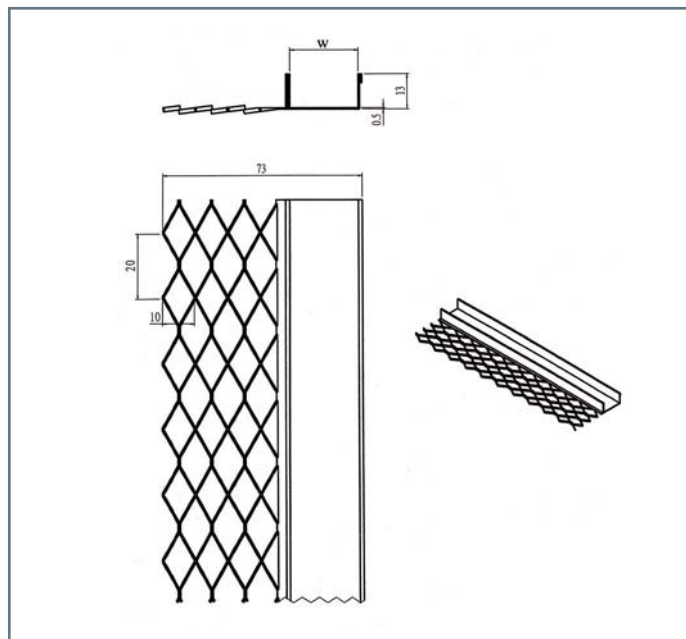


Item	Material	W	Length	Pcs / pack
ARC 15	Galv. Steel	15cm	2.70 / 3.00 M	25 or 40
ARC 20	Galv. Steel	20cm	2.70 / 3.00 M	25 or 40
ARC 25	Galv. Steel	25cm	2.70 / 3.00 M	25 or 40
ARC 30	Galv. Steel	30cm	2.70 / 3.00 M	25 or 40



# GALVANIZED STEEL TIES - Building Accessories

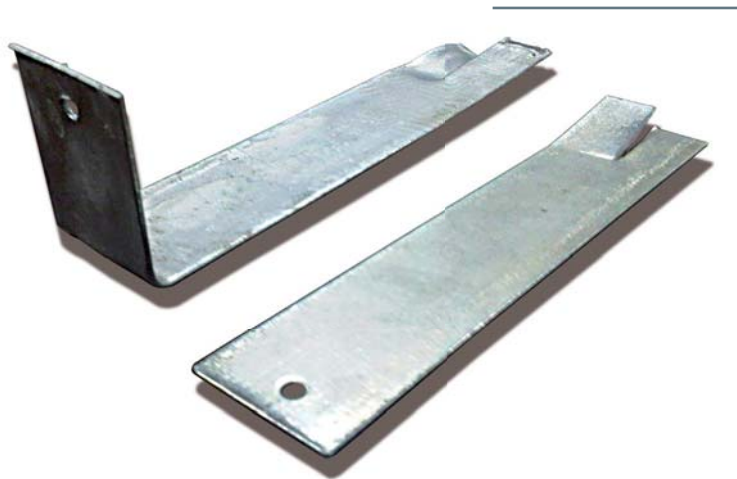

FISH TAIL

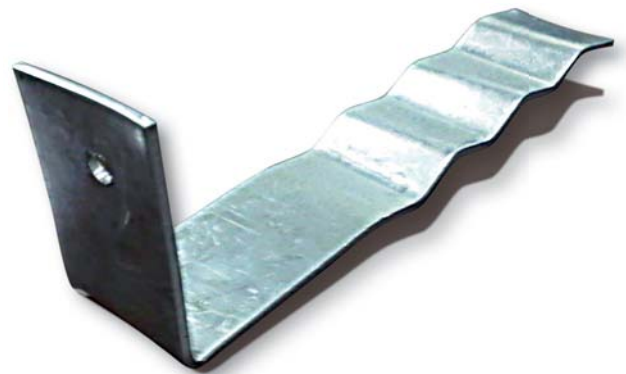

DOVE TAIL

## MATERIAL SPECIFICATION:

Hot Dipped Galvanized steel conforming to JIS G3302 /98 SGCC (or)  
ASTM A653, Zinc Coating Z245 to Z450

Galvanized steel ties are used for anchoring brick work, concrete wall, stone, marble, timber etc.


Thickness			Width			Length		
1.5mm	2.0mm	3.0mm	15mm	20mm	25mm	150mm	200mm	250mm

# DRYWALL PARTITION PROFILES

Atlas Profiles offer a quality solution for Drywall partition and Gypsum ceiling. Atlas Profiles are consistent in quality. We offer a wide range of specifications to suite buyer's requirements.

Atlas Profiles are always straight, easy to handle, saving time, material and cost.

## GALVANIZED TRACK

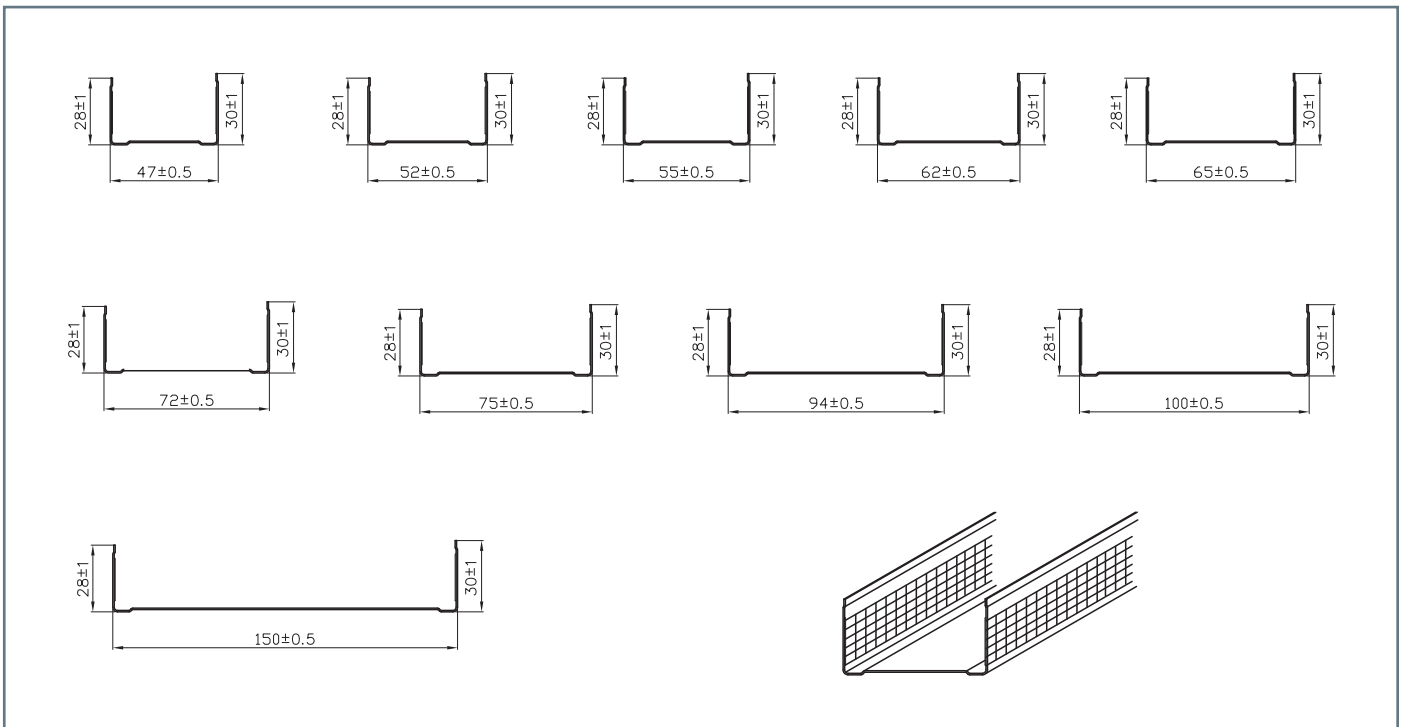

Item	Standard Thickness	Available Thickness in mm	Standard Length in m	Available Length	Unit Weight in Kg	Packing	
						Small BDL	Master BDL
T 42	0.55	0.45 - 1.00	3	Up to 7m	1.256	10	500
T 47	0.55	0.45 - 1.00	3	Up to 7m	1.321	10	500
T 52	0.55	0.45 - 1.00	3	Up to 7m	1.386	10	500
T 55	0.55	0.45 - 1.00	3	Up to 7m	1.425	10	500
T 62	0.55	0.45 - 1.00	3	Up to 7m	1.515	10	500
T 65	0.55	0.45 - 1.00	3	Up to 7m	1.554	10	500
T 72	0.55	0.45 - 1.00	3	Up to 7m	1.645	10	500
T 75	0.55	0.45 - 1.00	3	Up to 7m	1.684	10	500
T 94	0.55	0.45 - 1.00	3	Up to 7m	1.930	10	450
T 100	0.55	0.45 - 1.00	3	Up to 7m	2.008	10	450
T 150	0.55	0.45 - 1.00	3	Up to 7m	2.665	10	450




All our Profiles are branded

Material Specification:

Hot Dipped Galvanized steel conforming to JIS G3302/98 SGCC, ZINC COATING Z-275 (or) ASTM A653, ZINC COATING G90

## GALVANIZED STUD

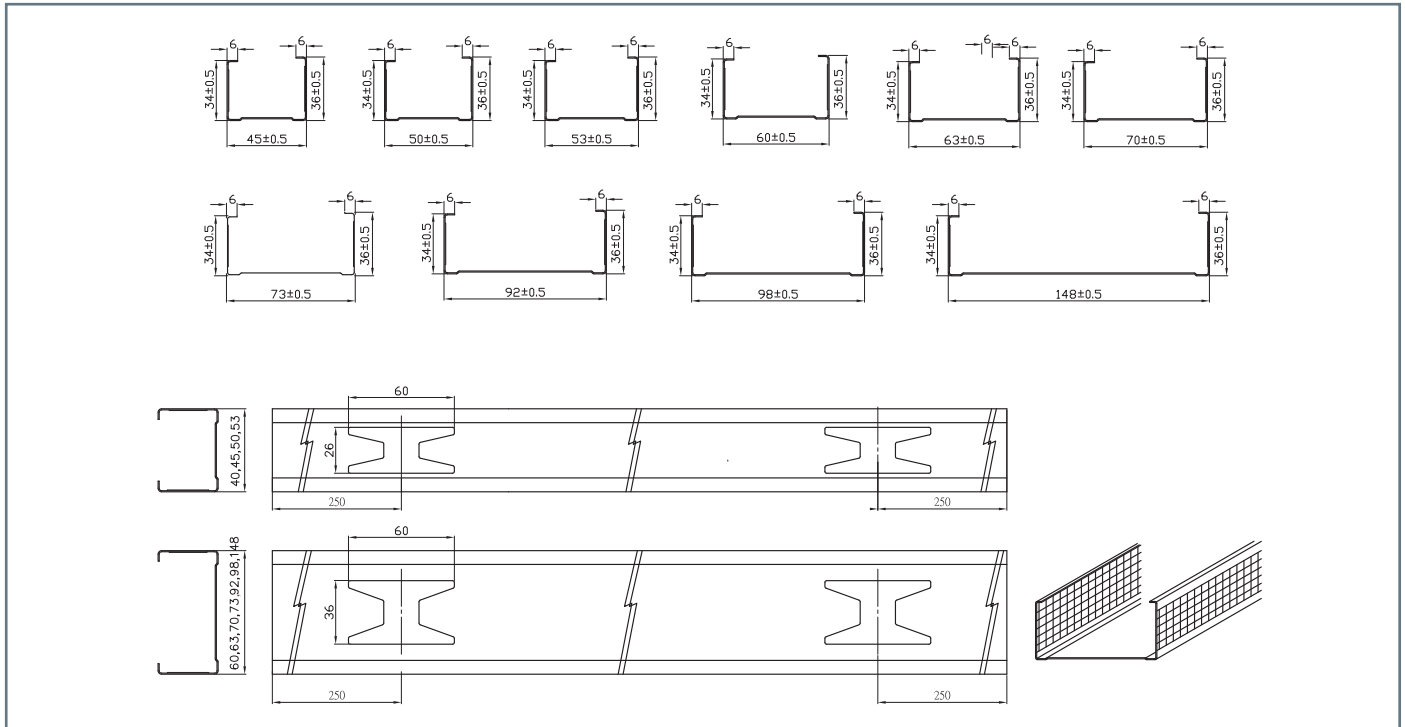


Item	Standard Thickness	Available Thickness in mm	Standard Length in m	Available Length	Unit Weight in Kg	Packing	
						Small BDL	Master BDL
S 40	0.55	0.45 - 1.00	3	Up to 7m	1.502	10	500
S 45	0.55	0.45 - 1.00	3	Up to 7m	1.567	10	500
S 50	0.55	0.45 - 1.00	3	Up to 7m	1.632	10	500
S 53	0.55	0.45 - 1.00	3	Up to 7m	1.671	10	500
S 60	0.55	0.45 - 1.00	3	Up to 7m	1.762	10	500
S 63	0.55	0.45 - 1.00	3	Up to 7m	1.800	10	500
S 70	0.55	0.45 - 1.00	3	Up to 7m	1.891	10	500
S 73	0.55	0.45 - 1.00	3	Up to 7m	1.930	10	500
S 92	0.55	0.45 - 1.00	3	Up to 7m	2.176	10	450
S 98	0.55	0.45 - 1.00	3	Up to 7m	2.254	10	450
S 148	0.55	0.45 - 1.00	3	Up to 7m	2.901	10	450

# GALVANIZED DRYWALL PROFILES

Galvanized J-Bead and Angle are used to protect gypsum board edges from chipping and to provide a perfect finish.

Atlas profiles are always straight, easy to handle, saving time, material and cost.

## GALVANIZED J-BEAD AND ANGLE

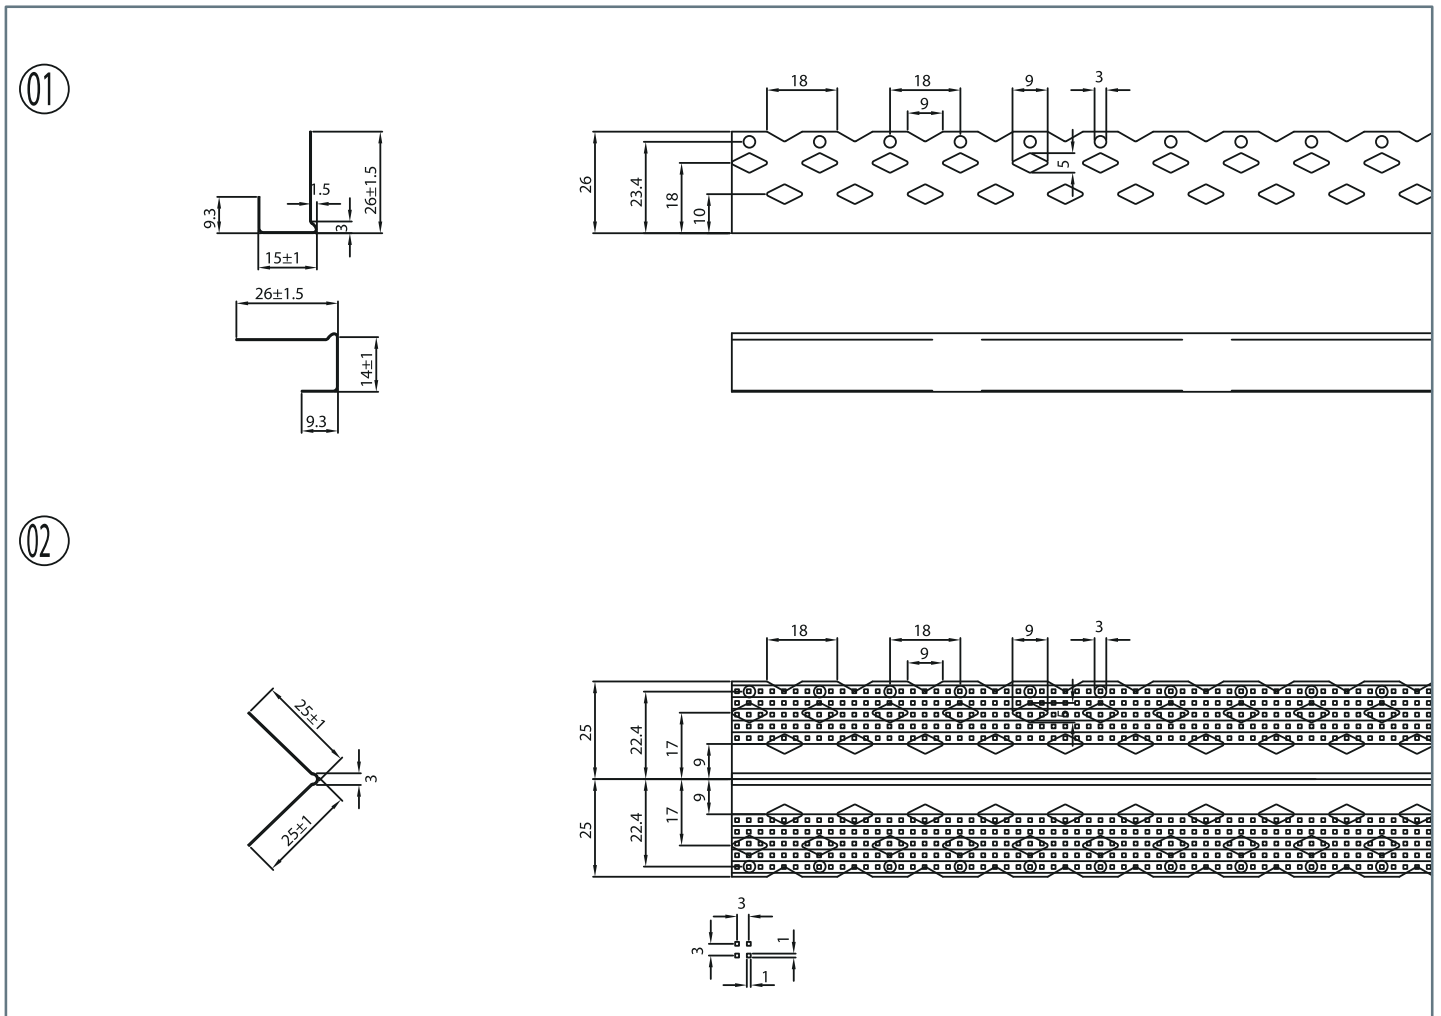


SI No	Item	Standard Thickness	Available Thickness	Standard Length	Available Length
1	J-Bead	0.40mm	0.35 - 0.45mm	3M	Up to 7M
2	DW Angle	0.40mm	0.35 - 0.45mm	3M	Up to 7M

# GALVANIZED DRYWALL PROFILES


Galvanized W-Beads are used to create groves for ceilings, it gives architectural beauty for gypsum ceilings

## GALVANIZED W-BEAD

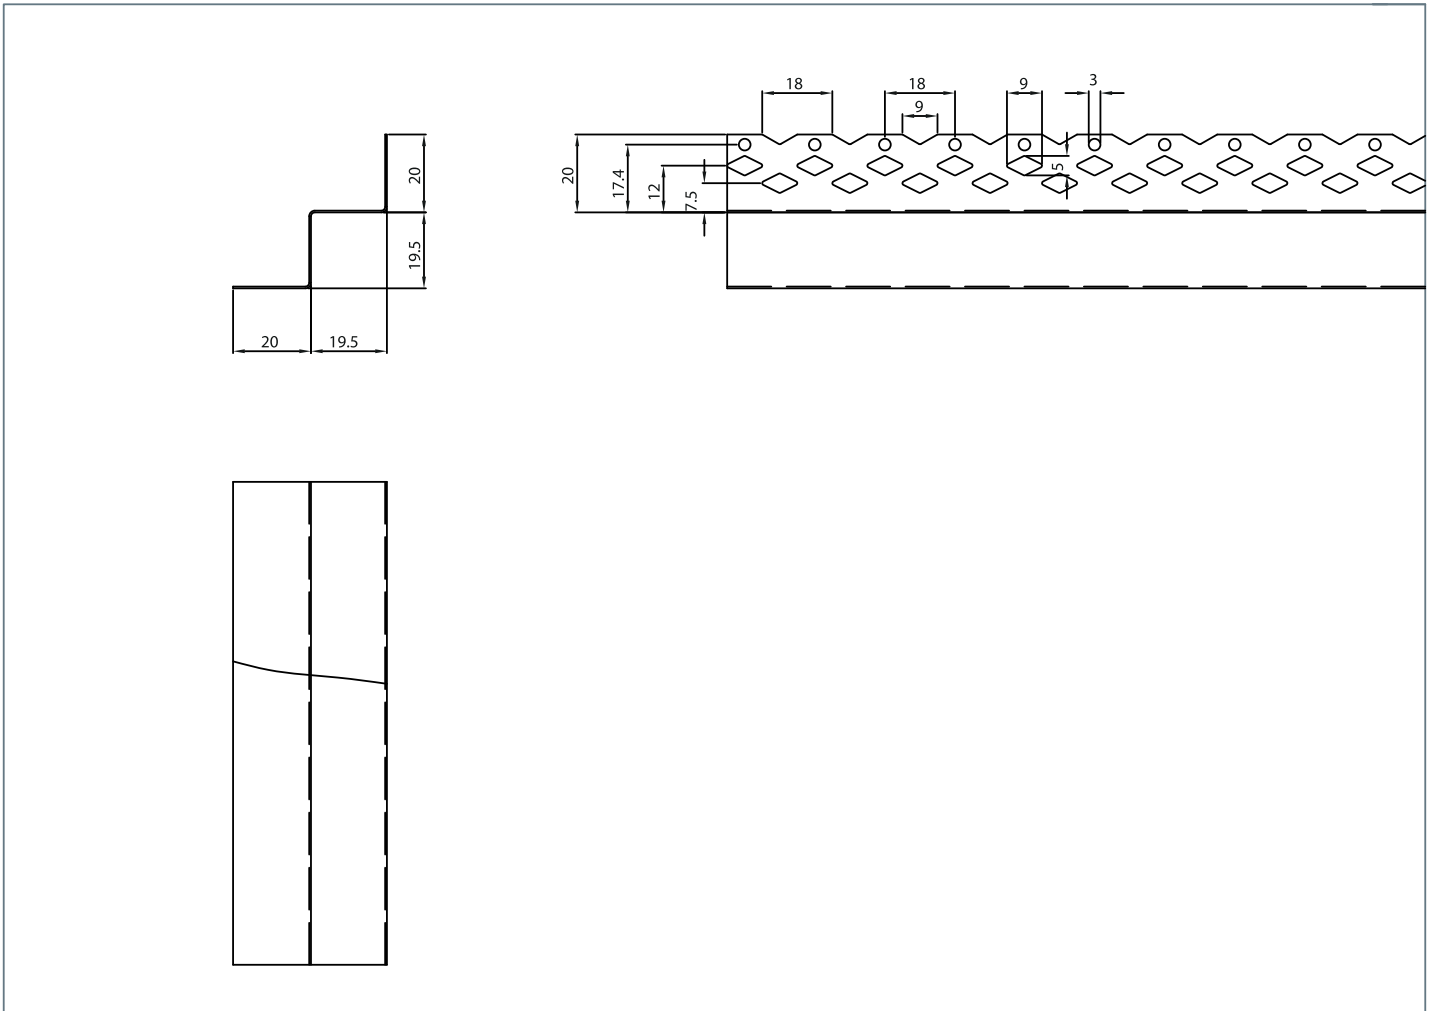

SI No	Item	Standard Thickness	Available Thickness	Standard Length	Available Length
1	W-Bead	0.45mm	0.40 - 0.50mm	3M	Up to 7M

# GALVANIZED CEILING PROFILES

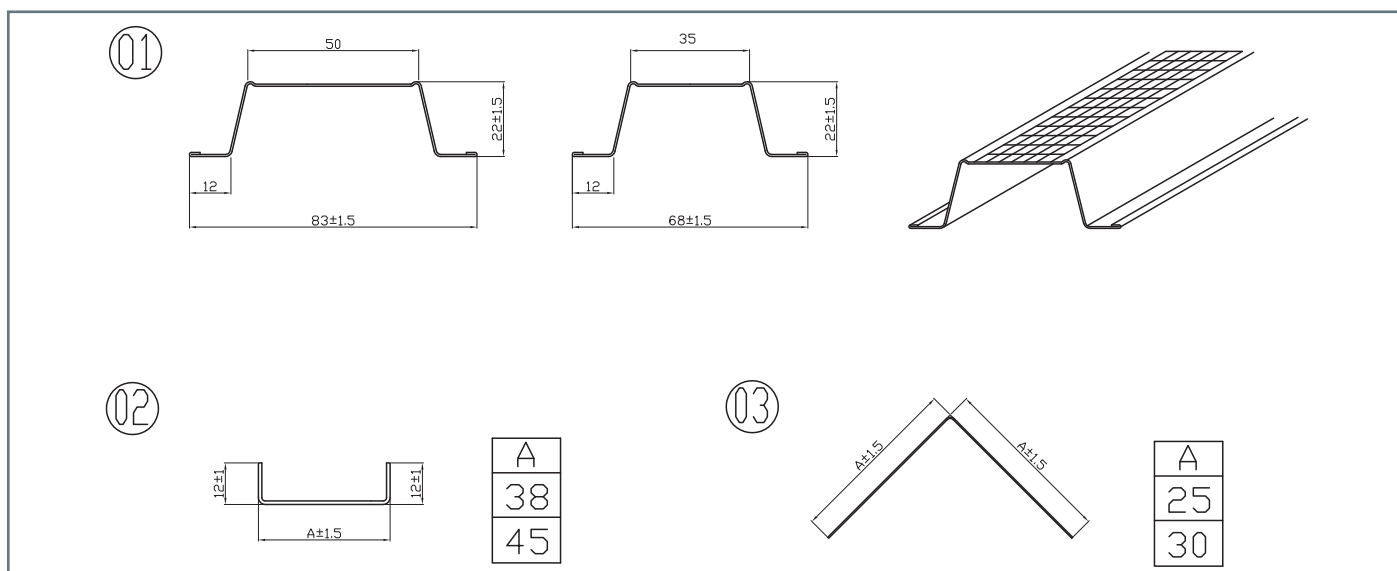

## FURRING CHANNEL

Item	Standard Thickness	Available Thickness in mm	Standard Length in m	Available Length	Unit Weight in Kg	Packing	
						Small BDL	Master BDL
FC 35	0.55	0.50 - 0.70	3	Up to 7m	1.386	25	500
FC 50	0.55	0.50 - 0.70	3	Up to 7m	1.580	25	500

## MAIN CHANNEL

Item	Standard Thickness	Available Thickness in mm	Standard Length in m	Available Length	Unit Weight in Kg	Packing	
						Small BDL	Master BDL
MC 38	0.71	0.50 - 1.50	3	Up to 7m	0.970	20	500
MC 45	0.71	0.50 - 1.50	3	Up to 7m	1.087	20	500

## ANGLE

Item	Standard Thickness	Available Thickness in mm	Standard Length in m	Available Length	Unit Weight in Kg	Packing	
						Small BDL	Master BDL
A 25	0.50	0.50 - 1.50	3	Up to 7m	0.577	50	500
A 30	0.50	0.50 - 1.50	3	Up to 7m	0.695	50	500

## Atlas Steel Factory @ Mina Abdullah



شركة اطلس التجارية (الكويت) ذ.م.م.  
ATLAS COMMERCIAL CO. (KUWAIT) W.L.L.  
TRADERS AND MANUFACTURERS OF BUILDING MATERIALS  
An ISO 9001 : 2008 Certified Company

